



coaxial valve

type MK 40 DR Ex FK 40 DR Ex

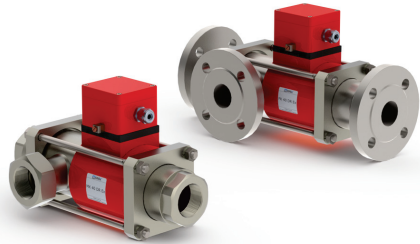

3/2 way valve direct acting
pressure range PN 0-16 bar
orifice DN 40 mm
connection thread/flange
function valve normally closed (A ► B)
 symbol **NC**
 valve normally open (A ► B)
 symbol **NO**



△ Above stated body materials refer to the valve port connections that get in contact with the media only!

design pressure balanced, with spring return, switching overlap
body materials ① ② steel, galvanized
 ③ ⑤ without non-ferr. metals
 ④ steel, nickel plated ⑥ stainless steel
valve seat synthetic resin on metal
seal materials NBR PTFE, FPM, CR, EPDM

details needed

- orifice
- port
- function NC/NO
- operating pressure
- inlet pressure at A, B or C
- flow rate
- media
- media temperature
- ambient temperature
- nominal voltage

general specifications		options
ports	MK threads G 1 1/2 - G 2 FK flanges PN 16	special threads special flanges
function	NC	NO
pressure range	bar 0-16	
	A ⇒ B max. 16 / B ⇒ A max. 16 / A ⇒ C max. 16 / C ⇒ A max. 16	
Kv value	m ³ /h 18,4 [A ⇒ B] 11,5 [A ⇒ C]	
vacuum	leak rate	< 10 ⁻⁶ mbar·l·s ⁻¹
pressure-vacuum	P ₁ ⇔ P ₂	upon request
back pressure	P ₂ > P ₁	see pressure range
media		gaseous - liquid - highly viscous - gelatinous - contaminated
abrasive media		upon request
damping	opening	
	closing	
flow direction		see pressure range
switching cycles	1/min 90	
switching time	ms opening 520 closing 150	
media temperature	°C DC: -20 to +40	
	AC: -20 to +40	
ambient temperature	°C DC: -20 to +40	
	AC: -20 to +40	
limit switches		inductive
manual override		available
approvals		LR/GL/WAZ
mounting		mounting brackets
weight	kg MK 18,5 FK 23,0	
additional equipment		upon request

⚠ The valves' technical design is based on media and application requirements. This can lead to deviations from the general specifications shown on the data sheet with regards to the design, sealing materials and characteristics.


⚠ If order or application specifications are incomplete or imprecise there exists a risk of an incorrect technical design of the valve for the required application. As a consequence, the physical and / or chemical properties of the materials or seals used, may not be suitable for the intended application.

electrical specifications		options
nominal voltage	U _n DC 24 V	special voltage
	U _n AC 230 V 40-60 Hz	special voltage
actuation	DC direct-current magnet	
	AC direct-current magnet with separate rectifier outside of the explosion-proof area	sand sealed rectifier
insulating rating	H 180°C	
protection	IP65	
energized duty rating	ED 100%	
connection	M16x1,5 terminal box	
optional additional equipment		
current consumption	U _n V-DC 24 200	20 48 98 110 210 220 230
	I _n A 2,05 0,29	2,72 1,07 0,54 0,48 0,25 0,25 0,21
explosion proof		II 2 G EEx em II T4 und II 2 D IP 65 T 130 °C PTB 03 ATEX 2051 X
limit switches		inductive NAMUR circuit amplifier

■ specifications not highlighted are standard
 ■ specifications highlighted in grey are optional

type MK 40 DR Ex

function: **NC**
closed when not energized (A ► B)

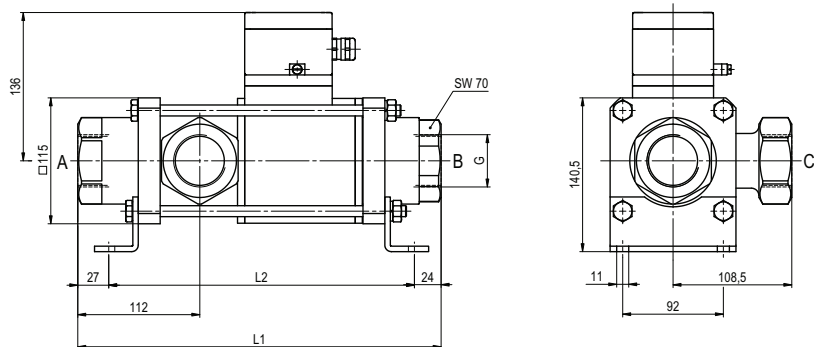

constructive length	L1	L2	L3
standard	332	281	394
with 1/2 inductive limit switches	373	322	435
with manual emergency (Hd)/ Hd and 1/2 ind. limit switches	373	322	435

flanges PN	DIN	ØD	Øk	Ød
16	EN 1092-1	150	110	18

type FK 40 DR Ex

function: **NO**
open when not energized (A ► B)

